




Pt100 Ex Resistance thermometer


Features

- Very fast response time
- Compact dimensions, compact design
- Extensive temperature range
- Flexible supply cable

Electrical connection 3-wire

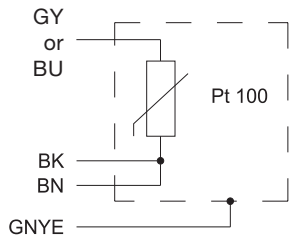

Structure

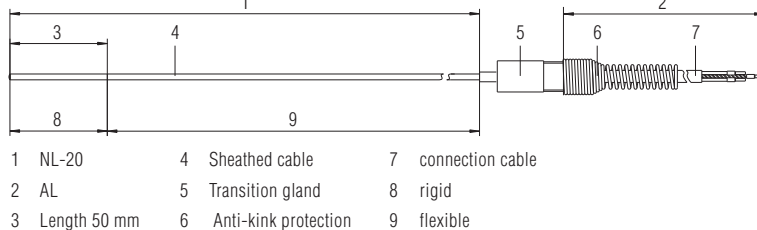

Description

This Pt100 Ex sheathed resistance thermometer has been particularly designed for use in potentially explosive areas. As it meets the requirements of the EEx m type of protection, intrinsically safe circuits can be dispensed with. Thanks to the pliable part of the resistance thermometer, the device is excellently suitable for application areas requiring a high degree of flexibility and replaceability (e.g. chemical and power plants).

Structure

The resistance thermometer is made of a 3 mm thick light plastic-sheathed cable with different lengths. This light plastic-sheathed cable is filled with magnesium oxide.

The pliable part of the resistance thermometer starts after 50 mm. Via a transition gland, the connection to a flexible supply cable is created.

Function

Metals increase the electrical resistance with rising temperatures. The platinum element of the resistance thermometer has a resistance of 100 Ω at 0 °C. This characteristic is used for this type of resistance thermometers to get an image of the temperature. The resistance changes of the Pt 100 Ex are converted into a temperature value and displayed by a control unit.

Explosion protection

Ex protection type

- II 2G EEx m II T6
- II 2D Ex mbD 21 T 80 °C

Certification

PTB 03 ATEX 2152 X

Technical data

Transducer

in 3-wire circuit

Temperature range

- 50 °C up to +600 °C or
- 200 °C up to +600 °C
- tolerances: class B (EN 60751)

Ambient temperature range

- 20 °C up to +60 °C or
- 50 °C up to +70 °C

Dimensions

- sensor tube diameter 3 mm
- sensor length 280 resp. 980 mm
- active sensor length 50 mm
- flexible part 230 resp. 930 mm
- bending radius min. 20 mm

Sheath material

stainless steel 1.4541

Connection cable

Rubber or silicone hose
4 x 0.75 mm²

Protection class

IP 65/EN 60529

Electrical data

Operating voltage

max. AC/DC 60 V

Signal circuit

- max. AC/DC 6 V
- max. AC/DC 10 mA
- max. AC/DC 60 mW

Selection chart

Measurement range	Ambient temperature range	Nominal length NL	Connecting cable AL Length	Connecting cable Version	Order no.
-50 °C up to +600 °C	-20 °C up to +60 °C	300 mm	2 m	rubber	27-7125-13330220
-50 °C up to +600 °C	-20 °C up to +60 °C	300 mm	5 m	rubber	27-7125-13330520
-200 °C up to +600 °C	-20 °C up to +60 °C	300 mm	2 m	rubber	27-7128-13330220
-50 °C up to +600 °C	-50 °C up to +70 °C	300 mm	2 m	silicone	27-7125-13330250
-50 °C up to +600 °C	-50 °C up to +70 °C	300 mm	5 m	silicone	27-7125-13330550
-200 °C up to +600 °C	-50 °C up to +70 °C	300 mm	2 m	silicone	27-7128-13330250
-200 °C up to +600 °C	-50 °C up to +70 °C	1000 mm	5 m	silicone	27-7128-13130250