



Audible and Visual Signals

TNDSP-25 Ex bell




The TNDSP Ex d electronic speaker is configured with traditional mechanical bell sound. With no moving parts it is the ideal replacement for standard mechanical Ex protected alarms or bells.

Specifications

Material	Antistatic polyamide, bracket in AISI 316L
IP Rating	IP66
Operating temperature	-20°C to +40°C
Approvals	
- Atex	Nemko 03ATEX1357
Standards	EN/IEC: 60079-0, 60079-1, 60079-7
Ex-Code	Ex des IIB + H2 T6 ⊕ II 2 G
Earthing	Internal M4
Entries	1xM20 + 1xM25 plugged
Connections	2.5mm ² max
Power	25W
Power consumption	19.6W (8W, 1kHz sine wave)
Sound level	P112 dB
Rated current	Max 2 Amp.
Operating voltage	24VDC (19.2 – 28VDC)
EMC protection	EN50082-2 / EN50081-2
Upon request	Other sound effects
Colour	Black



Sound Characteristics for TNDSP-25-Ex bell

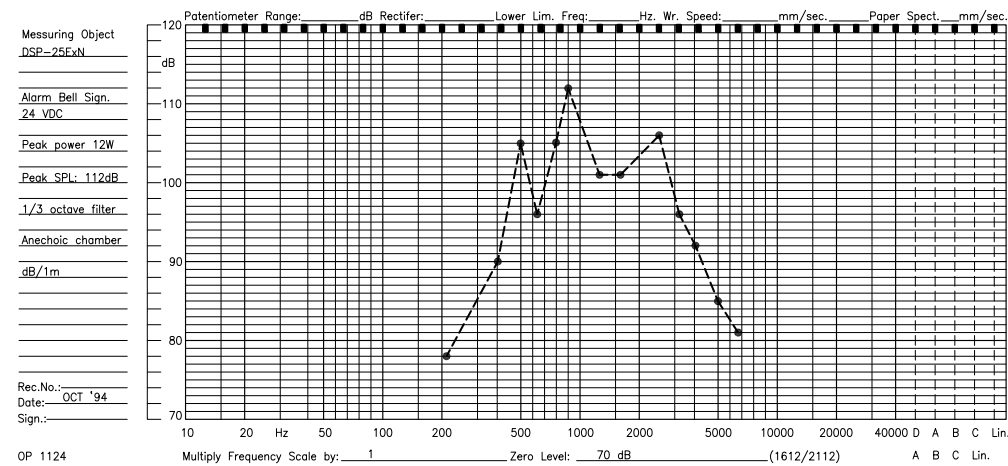

Dimensions

