



- Black box system
- Automatic calculation of the purge time
- WEB interface
- 3 x PT100/1000 inputs
- Modular design
- Separate purge gas input and output

### Explosion protection

ATEX marking	Ⓜ II 3G Ex ec mc ic [ic pzc] IIC T5, T4 Gb Ⓜ II 3D Ex tc [ic pzc] IIIC T95°C, T130°C Db
Certification	BVS 19 ATEX E 016
IECEX marking	Ex ec mc ic [ic pzc] IIC T5, T4 Gb Ex tc [ic pzc] IIIC T95°C, T130°C Db
Certification	IECEX BVS 19.0038X
Other approvals and certificates, see <a href="http://www.bartec.com">www.bartec.com</a>	
Ambient temperature	In storage -20 °C to +60 °C During operation -25 °C to +60 °C/T4 -25 °C to +50 °C/T5

### Technical data

Directives	Directive 2014/30/EU Directive 2014/34/EU
Structure	Ex e protective housing with integrated Ex mc/ic-protected p control system
Housing material	V4A stainless steel
IP rating	IP 66 according to EN/IEC 60529 IP 64 according to EN/IEC 60079-0
Terminals	Ex e: 0.08 to 2.5 mm <sup>2</sup> , fine-wire, tension spring Ex i: 0.2 to 1.5 mm <sup>2</sup> , fine-wire, push-in
Pressure measurement range	0 to 25 mbar (standard) or 0 to 300 mbar (on request)
Pre-purge time	0 to 120 min
Weight	5.8 kg


The SILAS<sup>pz</sup> Ex p control unit controls and monitors the pre-purge and operating phase of pressurised enclosure equipment protected in accordance with ignition protection type pz. Digital or proportional purge gas valves can be used as purge gas valves. The parameters can be set using the integrated WEB interface or the optionally available p operator panel. The SILAS<sup>pz</sup> features two release relays; one which is energised and one which has floating contacts. Two signal relays with one changeover contact each are additionally available. Three PT100/1000 inputs are available to monitor the temperature of the Ex p-protected equipment. Up to three switch values can be assigned to them. Model I comes complete with separate pressure measurement. The following components are additionally required to set up a complete control system:

- Sensor box<sup>pz</sup> 25 mbar
- Pressure monitor
- Purge gas valve, proportional or digital
- Valve fuse
- Pressure reducer
- There is the option to connect a p operator panel

### Electrical data

Supply voltage	24 V DC to 44 V DC, ±10 % or 100 V AC to 230 V AC, ±10 %
Power consumption	P <sub>v</sub> = approx. 19 watts
Normally open contacts	K1 release, max. 5 A (AC1) K2 release, floating, max. 230 V AC/3 A (AC1) K3 and K4 signal relays, floating, changeover contact, max. 1 A (AC1)
Inputs	3 x PT100/1000 1 x bypass 1 x main switch

### Dimensions

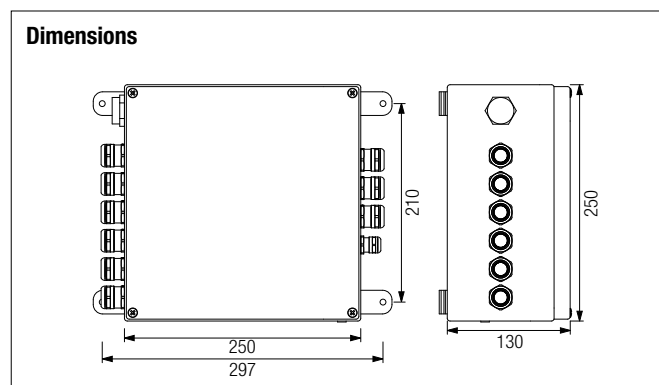

### Ordering information

Version	Code no.
24 V DC to 44 V DC, ±10 %	1
100 V AC to 230 V AC, ±10 %	2

Complete order no. A7-37S2-2111/□ 510

Please enter code number.

The accessories and order information can be found on the accessory pages. Technical data subject to change without notice.