



Traction cable

RADOX 9 GKW-AX 3600V MM S

Product description:

RADOX 9 GKW-AX 3600V MM S Single and multicore cables, screened (overall screen)
 Nominal voltage: 3600 / 6000 V AC
 Hazard level: MM (extra low temperature, extra oil and extra fuel resistant)


General features:

Halogen free, electron beam cross-linked cables with improved behaviour in case of fire, easy to strip, soldering iron resistant and flexible.

Application:

The cables are intended for permanent installation in rail vehicles or for applications in which a limited alternating bending stress occurs during service. Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

General composition of cable:

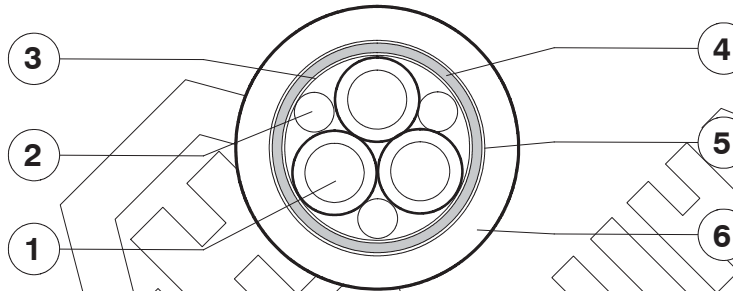

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. RADOX 9 GKW-AX 3600V M cores 2. Filler (optional) 3. Wrapping 4. EMC- screen 5. Wrapping 6. Sheath | <p>Conductor: stranded tin plated copper, acc. to EN 60228 cl. 5
 Insulation: RADOX EI 110 / EI 109
 Colours: black, numbered</p> <p>RADOX 125 REC
 Tape
 Tin plated copper braid
 Tape
 RADOX EM 104, colour: black (see Table 1),
 coloured (see Table 2)</p> |
|--|---|

Marking: HUBER+SUHNER RADOX 9 GKW-AX 3600V nX[*cross section*] MM S [part. No. + batch. No.]

Technical Data :

Voltage rating cond.- earth	U ₀	3600	V AC
Voltage rating cond.- cond.	U	6000	V AC
maximum permissible Voltage rating AC cond.- earth		4300	V AC
maximum permissible Voltage rating AC cond.- cond.	U _m	7200	V AC
maximum permissible Voltage rating DC cond.- earth	V ₀	5400	V DC
maximum permissible Voltage rating DC cond.- cond.		9000	V DC
Test voltage		12000	V AC
Temperature range		- 50 ...+ 120	°C
Min. bending radius			
fixed installation	cable diameter ≤ 12 mm	3 x D	
	cable diameter > 12 mm	4 x D	
sporadic movement	cable diameter ≤ 12 mm	4 x D	
	cable diameter > 12 mm	5 x D	

Copyright 2015 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG

Low Frequency Division

CH- 8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com



Traction cable

RADOX 9 GWK-AX 3600V MM S

NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours.

The lower temperature limit is determined by bending and elongation tests according to EN 60811-1-4 Par. 8, respectively low temperature behaviour tests for static conditions, e.g. for fixed installation according to GOST 20.57.406-81 - method 204-1 and GOST 17491-80.

The specified bending radii require a careful and proper handling using proven fastening technologies.

The cables are in conformity with:

Fire protection on railway vehicles, hazard level	HL1 - HL3	EN 45545
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 50305, 9.1.1 (EN 60332-3-25)
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 70 %	EN 61034-2
Toxicity	ITC ≤ 6	EN 50305, 9.2
Fire protection on railway vehicles, level of protection	1 - 4	DIN 5510
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 60332-3-25
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 60 %	EN 61034-2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 50267-2-1
Content of fluorine	HF ≤ 0.1 %	EN 60684-2, 45.2
Toxicity	ITC ≤ 3	EN 50305, 9.2
Fire protection on railway vehicles, category	A1, A2, B	NF F16-101
Fire protection on railway vehicles, class	C / F0	NF F16-101
Vertical flame spread	50 < L ≤ 540 mm	NF C32-070, 2.1
Vertical flame spread, bunched	L ≤ 300 mm	NF C32-070, 2.2
Smoke index	I.F. ≤ 5	X10-702-2, NF X70-100-1
Fire protection on railway vehicles, hazard level	LR1 - LR4	UNI CEI 11170
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 60332-3-25
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 70 %	EN 61034-2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 50267-2-1
Toxicity, insulation	ITC ≤ 6	EN 50305, 9.2
Toxicity, filler and sheath	ITC ≤ 3	EN 50305, 9.2
Requirement of hazard level code M	(according to EN 50264-1 or EN 50306-1)	
Extra low temperature	- 40°C	
Extra oil resistance	IRM 902, 72h, 100°C	
Extra fuel resistance	IRM 903, 168h, 70°C	

Applicable documents:

- EN 50355 Guide line for applications
- H+S 557 578 Current rating for single core cables
- H+S 563 053 Current rating for multi core cables



Traction cable

RADOX 9 GKW-AX 3600V MM S

Table 1 : Sheath colour black

Cable type n x mm ²	Conductor dia. _{nom} mm	Core dia. ¹⁾ nom. mm	Screen nom.		Cable dia. mm	R ₂₀ ²⁾ max. Ω/km	Z _T max. mΩ/m	C ³⁾		Fire load nom. kJ/m	Weight nom. copper cable kg/100m		H+S Part No.	
			dia. mm	cross section mm ²				core/ core/ pF/m	screen					
1x1.5	1.52	4.5	4.96	1.37	6.8±0.15	13.7	70	-	210	461	2.6	7.5	12556520	
3x1.5	1.52	4.5	10.7		13.6±0.4	13.7	40	-	-	-	-	29.5	85003034	
1x2.5	1.94	5.1	5.6	1.47	7.6±0.15	8.21	70	-	240	991	3.6	9.6	12556521	
2x2.5	1.94	5.1	11.2	5.55	14.1±0.4	8.21	50	110	180	2835	10.2	30.7	85068061	
1x4	2.4	5.7	6.26	1.91	8.3±0.15	5.09	35	-	270	1170	5.3	12.2	12556522	
3x4	2.4	5.7	13.3	7.13	16.5±0.5	5.09	30	-	-	4469	17.8	44.8	85014383	
4x4	2.4	5.7	15.4	9.88	19.0±0.5	5.09	30	-	-	5781	23.6	58.5	85014470	
6x4	2.4	5.7	18.9	12.5	22.8±0.5	5.09	25	-	-	8585	34	83.9	85014384	
1x6	2.93	6.3	6.86	2.36	9.1±0.2	3.39	50	-	310	1392	7.4	15.6	12556523	
3x6	2.93	6.3	14.6	8.32	18.0±0.5	3.39	30	-	-	4493	24	56	85018198	
4x6	2.93	6.3	17	10.6	20.8±0.5	3.39	70	130	220	6976	31.5	73.2	12582210	
1x10	3.89	7.5	8.21	3.29	10.4±0.2	1.95	20	-	-	360	1729	12.3	22.3	12556524
2x10	3.89	7.5	16.1	9.72	19.7±0.5	1.95	70	150	260	5914	28.1	65.3	12582211	
1x16	5.3	9.4	10.3	5.55	12.9±0.25	1.24	40	-	420	2790	19	35	12556525	
3x16	5.3	9.4	21.7	16.6	26.2±0.6	1.24	20	-	-	9179	58	122	85018199	
1x25	6.6	11.0	11.7	4.59	14.3±0.25	0.8	50	-	470	3321	25.1	43.2	12556526	
1x35	7.80	12.6	13.3	4.94	15.7±0.3	0.57	70	-	500	2900	35	56	12556527	
4x35	7.80	12.6	33.4	35.7	39.7±0.7	0.57	30	190	320	18860	158	294	12584431	
1x50	9.30	14.6	15.3	5.65	17.7±0.3	0.39	70	-	540	3530	49	74	12556528	
3x50+ 1x10	9.30 3.89	14.6 7.5	33.4	35.7	39.8±0.7	0.39 1.95	70 20	460	780	20677	176	316	85063126	
1x70	11.4	16.7	17.6	8.91	20.2±0.3	0.28	70	-	640	6147	70.6	102	12556529	
1x95	12.9	18.7	19.8	12.6	22.2±0.3	0.21	70	-	660	6805	90.9	126	12556530	
1x120	14.9	21.0	22.1	14.0	25.3±0.4	0.16	70	-	705	8200	114	160	12556531	
1x150	16.8	23.2	24.3	15.7	27.6±0.4	0.13	70	-	750	10935	143	197	12556532	
1x185	18.3	25.0	26.1	15.7	29.6±0.4	0.11	70	-	780	11781	170	230	12556533	
1x240	21.1	28.0	29.4	22.6	32.7±0.4	0.08	70	-	860	13395	224	292	12556534	
1x300	23.7	30.8	32.6	35.2	36.3±0.4	0.07	70	-	930	15313	291	370	12558472	

1) Core details see H+S Datasheet 543 851
 2) conductor resistance at 20 °C according to EN 60228
 3) capacity typical value



Traction cable

RADOX 9 GWK-AX 3600V MM S

Table 2 : Sheath colour different

Cable type n x mm ²	Conductor dia. _{nom} mm	Core dia. ¹⁾ nom. mm	Screen nom.		Cable dia. mm	R ₂₀ ²⁾ max. Ω/km	Z _T max. mΩ/m	C ³⁾		Fire load nom. kJ/m	Weight nom.		Colour	H+S Part No.
			dia. mm	cross section mm ²				core/ core	core/ screen pF/m		copper	cable		
1x300	23.7	30.8	32.6	35.2	36.3±0.4	0.07	70	-	930	15313	291	370	rd	84084762

