



Dipstick interface 8, type 6932-114

- Interface plug-in card for evaluation of dipstick information of type 6706-10
- Connection of up to 8 dipsticks
- Interface to basic module type 6932-11

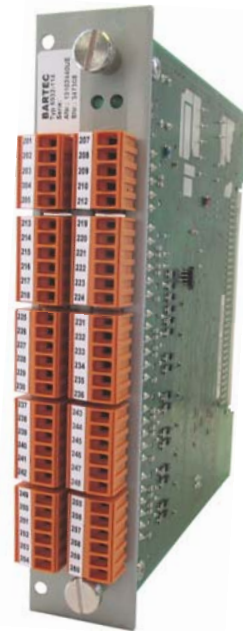


Technical data	
Electrical data	
Supply voltage	DC 24 V
Supply of dipsticks	DC 24 V; fuse reversible
Supply of inclination sensor	DC 24 V; fuse reversible
System interface	PNET, serial, asynchronous, 76800 bit/s, RS485
Interfaces to dipsticks	8 x RS485
Interface to inclination sensor	proprietary CAN
Interface to volumetric measurement station	PNET, serial, asynchronous, 76800 bit/s, RS485
Ambient conditions	
Ambient temperature	-20 ... +70 °C
Ambient temperature (inside the basic module)	-20 ... +50 °C
Storage temperature	-20 ... +50 °C
Protection type	IP00 in accordance with DIN 40050
Mechanical data	
Dimensions	See dimensional drawing
Weight	0,35 kg
System connection	plug-in card
Connection	Terminals 1,5 mm ² pluggable
Ordering details	
Designation	Order number
Dipstick interface 8, type 6932-114	347308

Dimensions

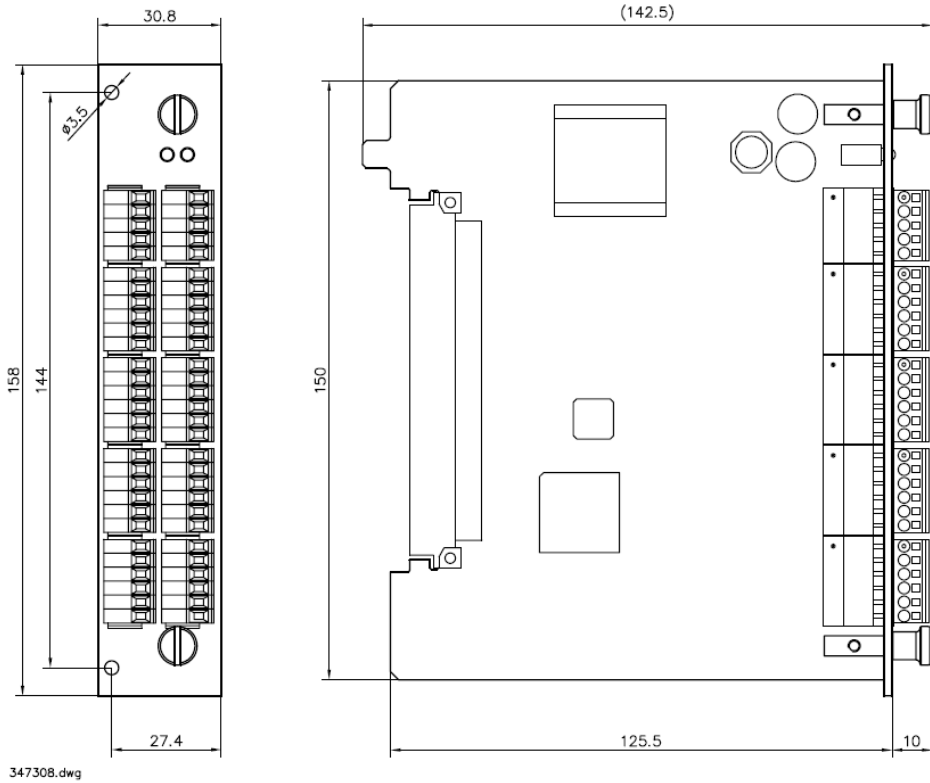

347308.dwg

Terminal connection

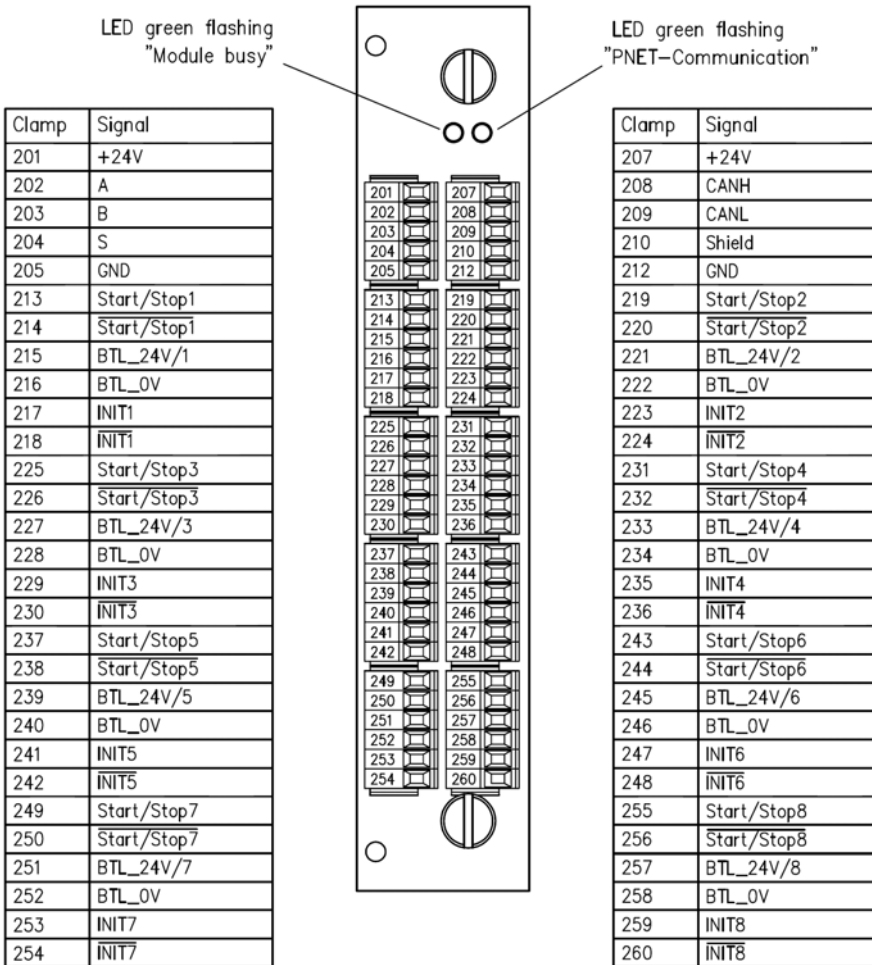

347308.dwg