


## Desk top reader for bar code bottles, type 6727-61

- Desk top reader for milk test bottles with bar code (Interleaved 2/5, 10 digits).
- Connection via RS-232-interface to every commercial PC.

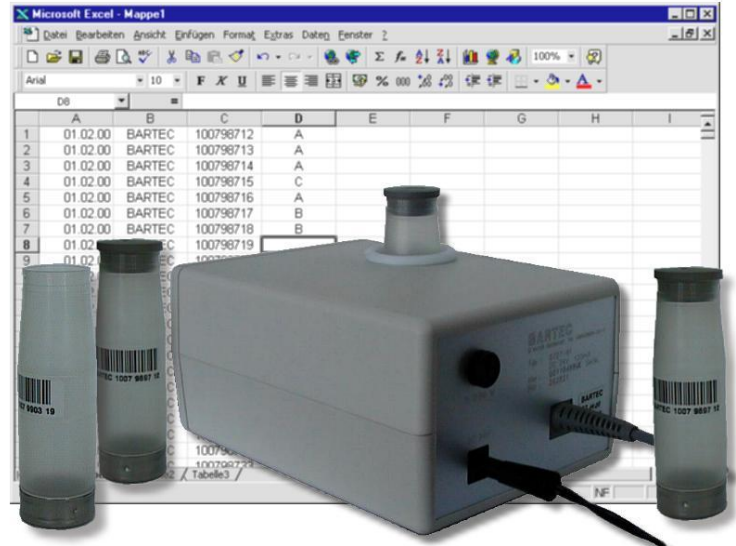

Technical data	
<b>Mechanical data</b>	
Housing	PS-housing
Dimensions	195 x 135 x 100 mm (L x W x H)
Weight	1,0 kg (without power supply unit)
Protective System	IP 54
<b>Ambient conditions</b>	
Admissible operating temperature	0 ... + 50 °C
Admissible storage temperature	- 10 ... + 60 °C
Climatic class	average air humidity 75%, non condensed
<b>Electrical data</b>	
Input voltage	DC 24 V ± 10 %
Input current	max. 120 mA
Power supply	Power supply unit (DC 24 V/340 mA)
<b>Device-specific data</b>	
Readable bar codes	2/5 Interleaved, 10 digits (other codes on request)
Processing speed	< 2 sec per bottle

<b>Interface</b>		
Serial interface	RS 232 9 Pin. Sub-D	9 600 baud, no Parity, 8 Data bits, 1 stop bit, no handshaking
<b>Connection allocation</b>		
Power supply	Extra low voltage plug 2 pole according to DIN 45323 + 24 V outside 0 V inside	
RS-232-Connection		
Pin assignment	SUB-D 9-pol. Pin 2 Pin 3 Pin 5 Pin 7 Pin 8	Designation TXT RXT GND CTS RTS
<b>Order information</b>		
	Desk top reader bar code bottles with serial interface (RS 232)	2028 22
Spare parts	Connection cable RS 232	2025 27
	Barcode interface	2025 26
	Power supply unit 100 - 240 VAC/24 VDC/625 mA, type 4312-8.2	U010 11 431282
	Bottle guidance, type 6727-00-59	2037 04
	Carrier plate, type 6727-00-60	2037 05
	Roll, type 6727-00-61	2037 06