

The intrinsically safe keyboard and the mouse variants are intended for POLARIS Professional and POLARIS Remote for zone 1 and 2 and for zone 21 and 22. They are connected directly to the POLARIS Panel PC or POLARIS Remote. The chemically resistant polyester foil is easy to clean and resistant to many aggressive fluids. The keyboard is available in various languages.


Explosion protection

Marking ATEX	II 2G Ex ib IIC T4 Gb II 2D Ex ib IIIC T120°C Db
Certification	IBEXU 05 ATEX 1117 X
Marking IECEx	Ex ib IIC T4 Gb Ex ib IIIC T120 °C Db
Certification	IECEx IBE 11.0007 X
Other approvals and certificates, see www.bartec.de	

Technical data

Construction	Front-panel fitting
Protection class	IP 65
Material	Polyester foil on aluminium sheet (conditionally UV-resistant)
Dimensions (W x H)	420 mm x 170 mm
Wall cut-out	390 mm x 140 mm
Installation depth	18 mm
Weight	approx. 700 g

Dimensions and wall cut-out for keyboard (in mm)

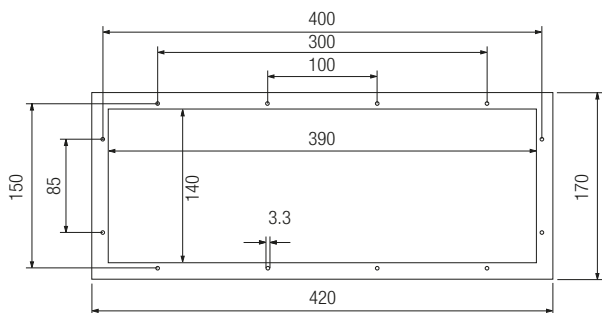

all hole diameters: 3.3 mm


Ordering information

Language	Order no.
German	17-71VZ-4010
English	17-71VZ-4020
French	17-71VZ-4030

Other languages on request.
Technical data subject to change without notice.



Dimensions (in mm)

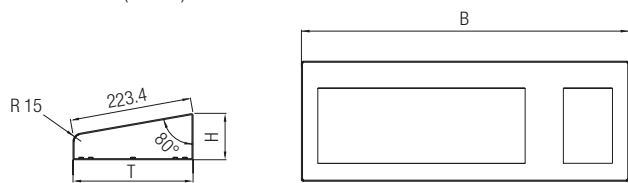

Technical data

Material	Stainless steel 1.4301; AISI 304
Dimensions (W x H x D)	600 mm x 85 mm x 220 mm
Protection class	IP 65

Ordering information

Enclosure	05-0041-0277
-----------	---------------------

Complete solution with installed equipment on request.
Technical data subject to change without notice.